

# ListenPoint Interface with ClearOne Interact Pro Application Note

Don't miss a single sound.




## Description

This document describes how to connect a ListenPoint LPT-C6 Control Unit to a ClearOne Interact Pro unit via line inputs and outputs. The procedures listed here are to be used as a starting point with minor level and setup adjustments to be made as necessary in both ListenPoint and ClearOne Interact software.

## Connecting the line inputs/outputs

1. Connect the line output from the ListenPoint Control Unit (Euro connector) to the line input of the ClearOne Pro unit (Mini euro connector).
  - a. On the ListenPoint Control Unit, this should be connected to Teleconference output.
  - b. On the ClearOne unit, this should be connected to the line input.
    - i. Connections labeled (A) shown below.

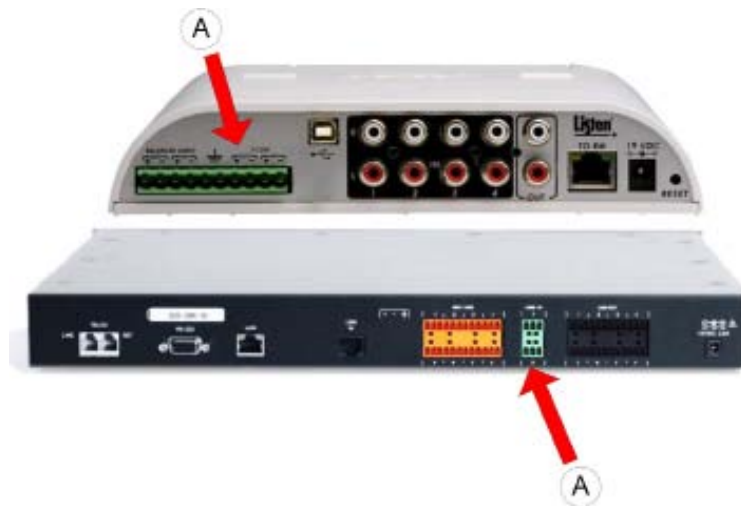


# ListenPoint Interface with ClearOne Interact Pro Application Note


Don't miss a single sound.



2. Connect the line output from the ClearOne Pro unit (Mini euro connector) to the line input of the ListenPoint Control Unit (Euro connector).
  - a. On the ListenPoint Control Unit, this should be connected to Teleconference input.
  - b. On the ClearOne unit, this should be connected to the line output.
    - i. Connections labeled (B) shown below.

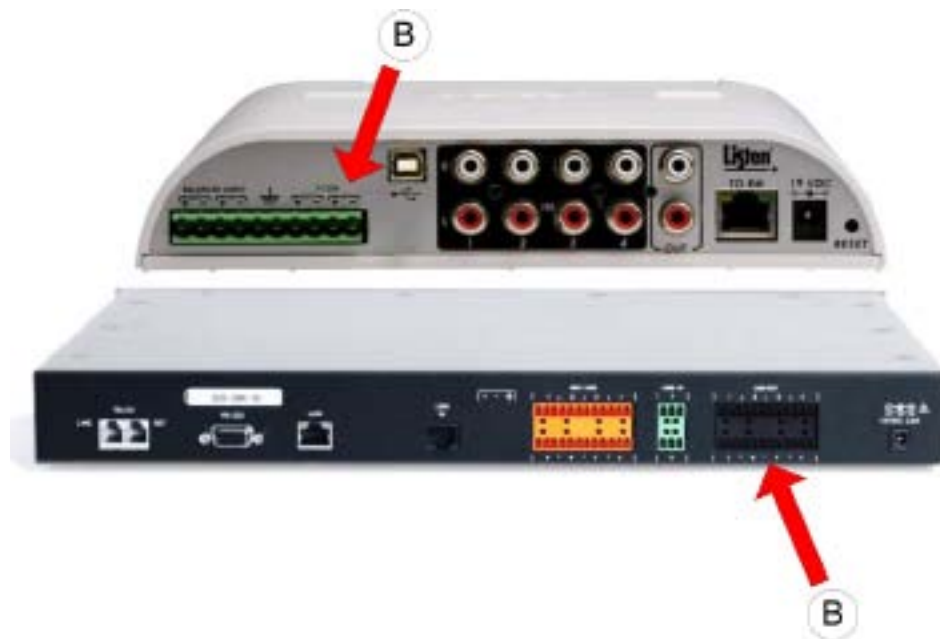

3. Wire diagram shown below:

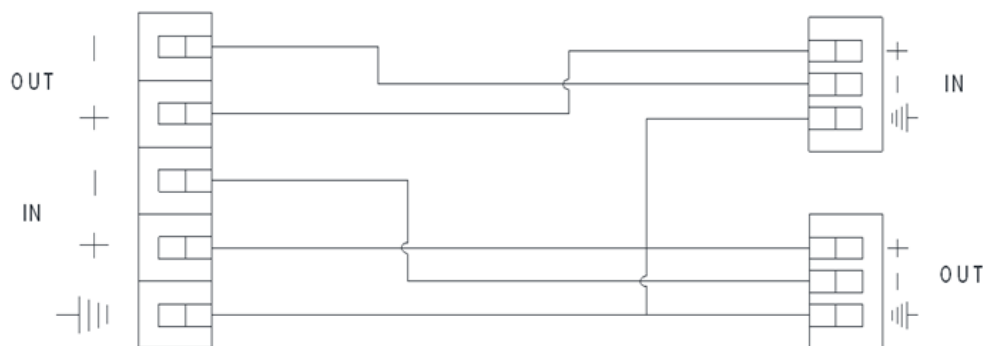

# ListenPoint Interface with ClearOne Interact Pro Application Note

Don't miss a single sound.



4. Connect a standard analog line to the Telco Line connector (C) on the back of the ClearOne unit.
  - a. Connection labeled (C) shown below:



## Configuring the ListenPoint Control Unit using the front display

1. Press the power button to turn the CU on.
2. On status window, scroll to and push to select "Aux Select".



3. On aux select window, scroll to and select "Teleconference".



# ListenPoint Interface with ClearOne Interact Pro Application Note


4. The teleconference input is set to 0 dB which is a nominal listening level. Adjust the input if needed to increase or decrease the level coming from the ClearOne Pro unit



5. No adjustment available on line output.

## Configuring the ClearOne unit using Interact software

1. Install and configure the ClearOne Interact Pro software according to the software installation instructions.
2. Connect your computer to the ClearOne using a straight through RS232 serial cable.
3. Open up the Interact software
  - a. Select New File
    - i. Select Interact Pro

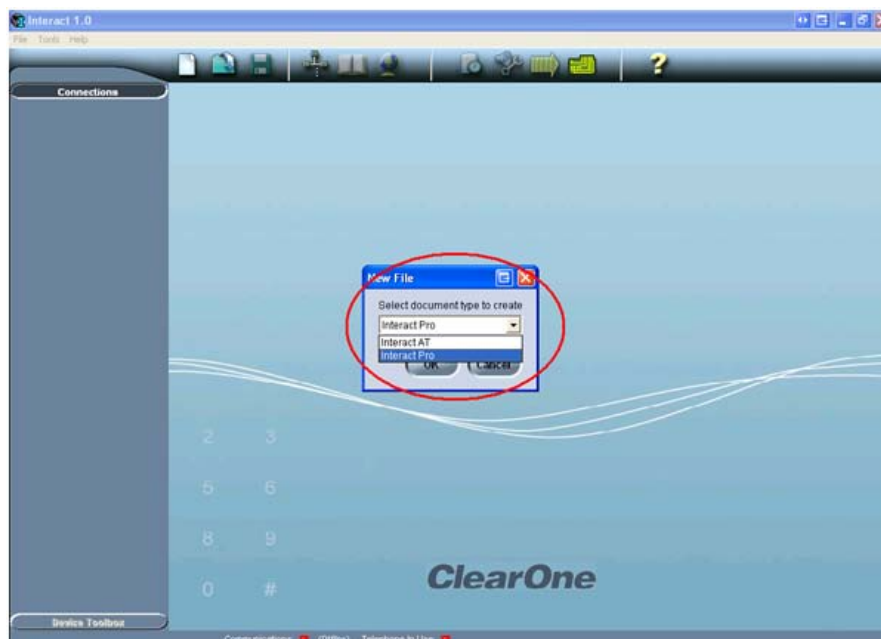


# ListenPoint Interface with ClearOne Interact Pro Application Note

Don't miss a single sound.


**Listen**<sup>®</sup>  
www.listentech.com

4. Select the Mixer Console in the middle of the screen to bring up the matrix.

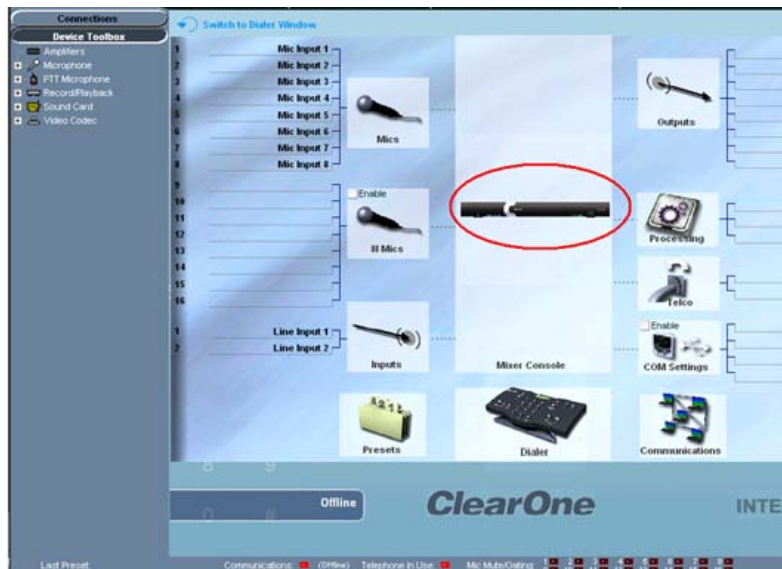

5. Verify these cross points are highlighted green and at a 0 level.

- Mic 1 input to Telco TX
- Telco RX to Output 1

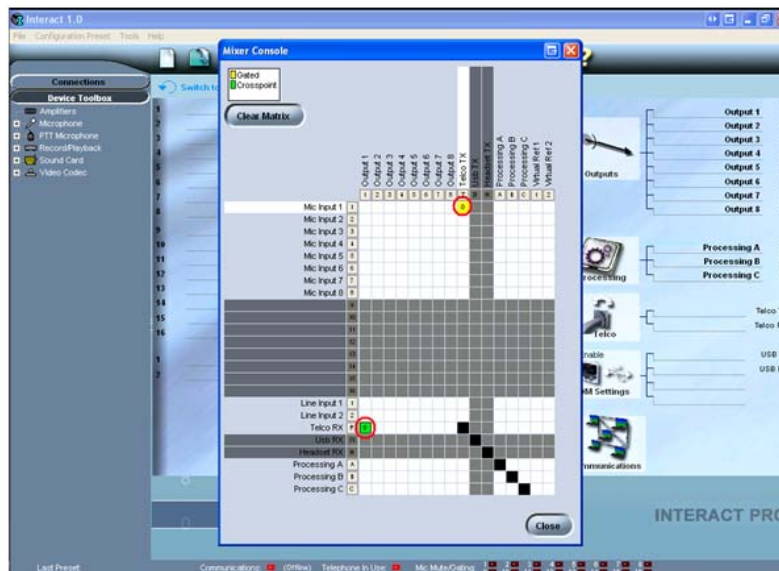

6. The software is now set up to allow audio flow from each device.

This concludes interfacing the ListenPoint system to a ClearOne Pro unit. Adjustments might need to be made to any of the input or output gains based on your environment but this will give you a starting point for making the connection successful.

For additional assistance with the ListenPoint system, contact Listen Technical Support at +1.800.330.0891.