


ListenPoint® Microphone/Media Interface Quick Reference

Mic Input:
3.5 mm jack
for optional
external
microphone.



Line Input:
3.5 mm jack
for MP3 player
or other audio
source.

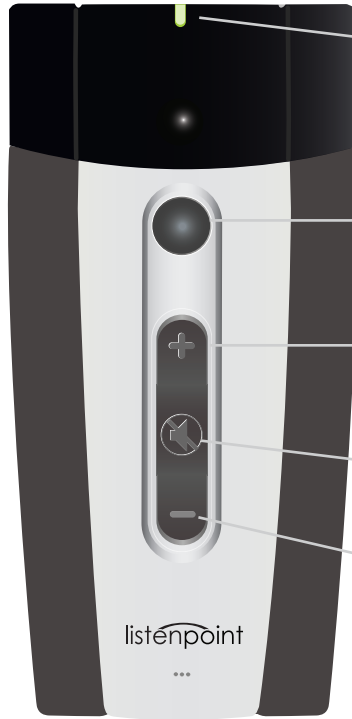

Power On: To turn M1 on, push any button for one (1) second.

LED: Green - M1 on
Green Blinking - Muted
Red - Low battery
Red Blinking - Charging
Amber - Programming functions

Soft Button: Typically mutes the aux inputs. See customization guide for advanced programming options.

Volume Up: Increases the microphone volume, if muted, button increases aux input level.

Mute/Power Off: Push to mute. Hold down for four (4) seconds to turn off.

Volume Down: Decreases the volume, if muted, button decreases aux input level.

Place M1 facing forward in charging/storage station after each use.



The user is cautioned that any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For further details regarding advanced options for your ListenPoint products download the ListenPoint Customization Guide at: www.listenpoint.com/support-tools-downloads or please contact Listen at +1.801.233.8992 • 1.800.330.0891 North America

listenpoint®

ListenPoint® Microphone/Media Interface Quick Reference

The ListenPoint system offers two options to use the LPT-M1 ListenPoint Microphone/Media Interface (M1) with the system - **Instant On™** (default setting) and **Auto-Registration**.

Instant On™ - The M1 is set to a specific frequency/channel. The default factory setting is set to channel 1. If there are more than one M1s in the same room, additional units must be set on another channel to avoid interference.

To change channel, follow these instructions:

1. Power down the M1 by pressing and holding the mute button (button C) until LED goes out.
2. Press and hold buttons A & C for three seconds.
3. After holding down these buttons for three seconds, the LED will illuminate RED. Upon releasing the buttons, the LED will blink RED rapidly indicating you are in programming mode.
4. While the LED is blinking, press button B to change the M1 to channel 2 (in a four M1 system, buttons C & D will program the unit to channels 3 & 4). To put the unit back on channel 1, press button A.
5. The M1 will then be active on the chosen channel and the GREEN LED will be illuminated.

NOTE: To determine which channel the M1 is programmed to, turn the unit off/on. When the unit is initializing, the LED will blink RED – once for channel 1, twice for channel 2 etc. All units are shipped default on channel 1. If there are two or more M1s in the same room, be sure one has been programmed to another channel.

Auto Registration - As the M1 enters a room, the system will automatically determine the frequency for use.

To enable **Auto-Registration**, follow these instructions:

1. Power down the M1 by pressing and holding the mute button (button C).
2. Press and hold buttons A & C for three seconds.
3. Let the M1 sit idle for 18 seconds. The LED will blink rapidly during this time.
4. After 18 seconds, the M1 will turn off. Upon the next initialization, the M1 will automatically auto-register to the system.

NOTE: It may take a few seconds for registration. For best results, move the M1 close to the RM on the ceiling. Once the M1 is linked with the system, it will not need to register again.

